

Tactics Legend


- DF** Deflection Booming
- DV** Diversion Booming
- EX** Exclusion Booming
- FO** Free Oil Recovery
- PR** Passive Recovery
- SR** Shoreside Recovery
- S** Staging Area
-  Boat Ramp
- BB** Beach Berm
- TG** Tide Gate
-  Protected-Water Boom
-  Open-Water Boom
-  Snare/ Sorbent Boom

Equipment - All Tactics

Boom(ft)	8400
Marine anchors	44
Shore anchors	21
Sorbent Boom(ft)	1400
FO Recovery Sys	2
Shore Responders	2
Boat Responders	9
Boats	3

Version

2/15/2023

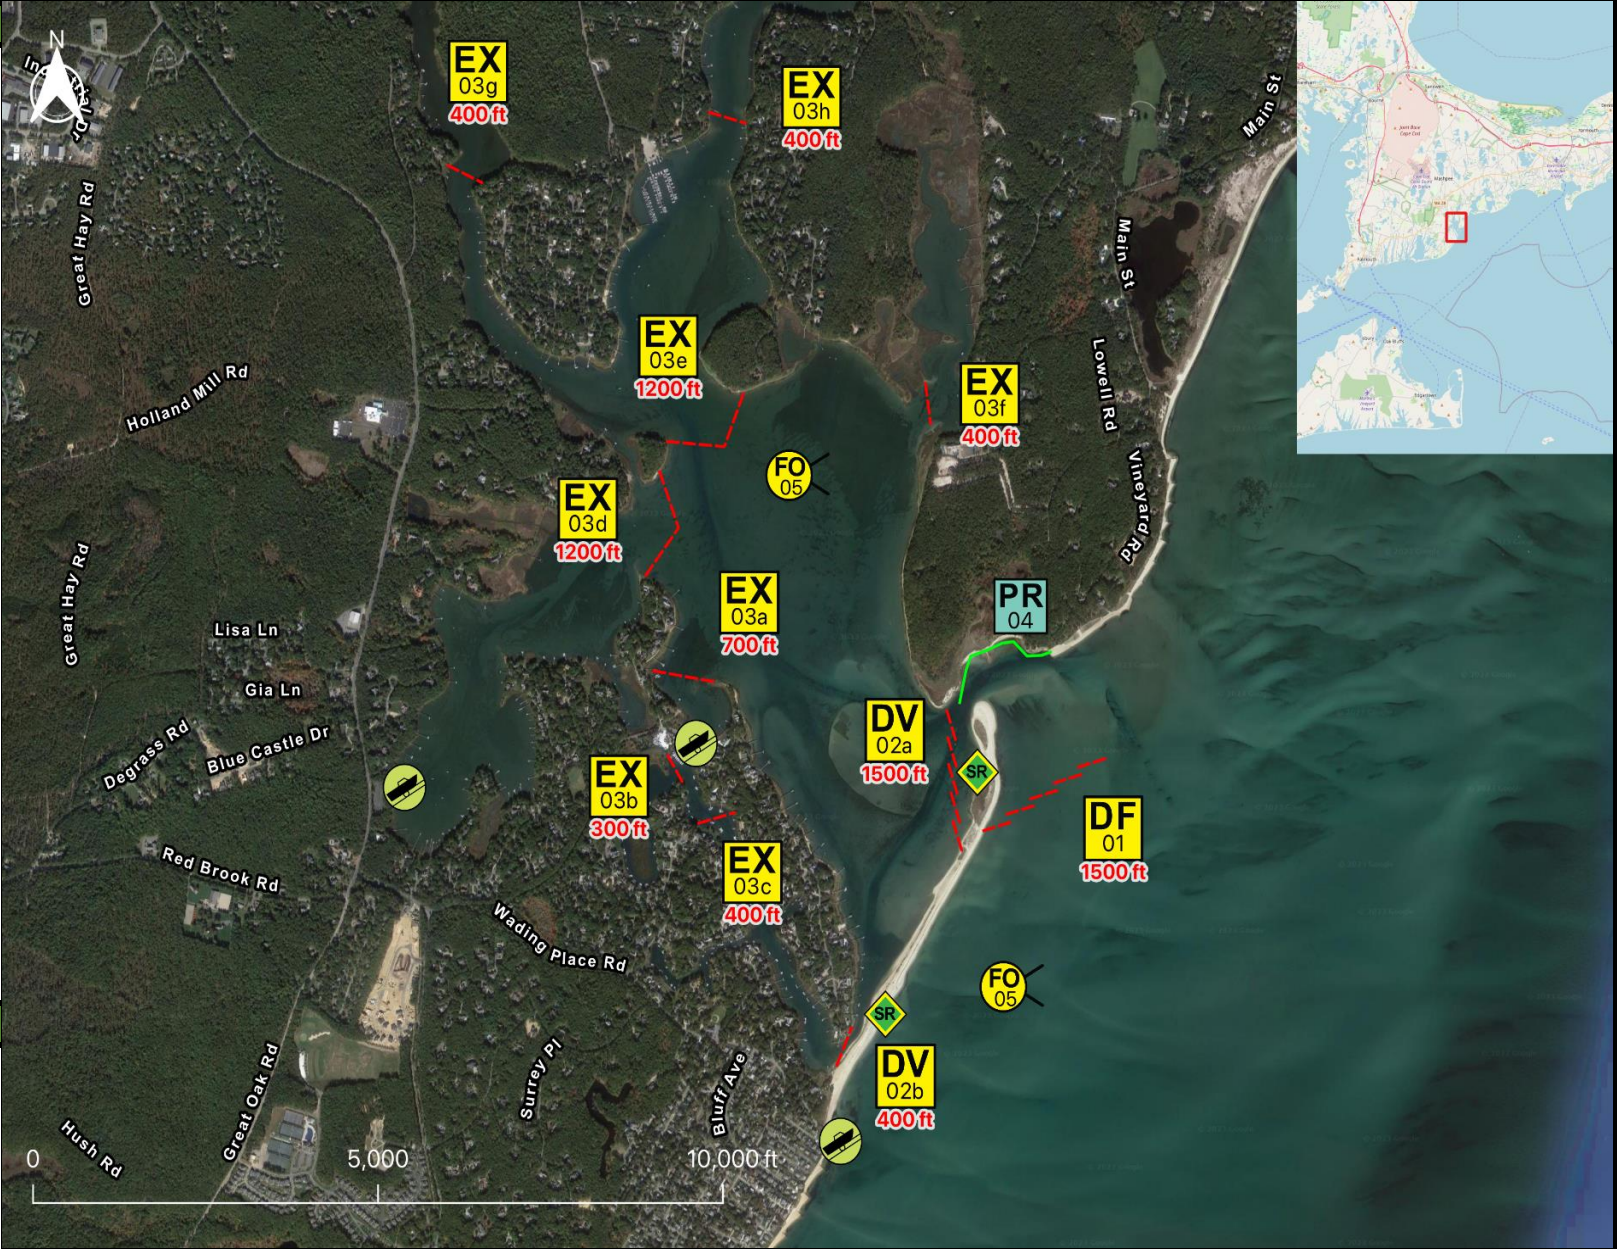












Response Trailer, Tactics Deployment, and Responder Safety Information

A total of 9 state response trailers are required to implement all the tactics in this GRS. Responders should always consider on-scene conditions before deploying GRP tactics. Tactics may not be safe or effective under certain conditions. Responder safety should always be the first priority.

Location

Latitude: 41°35'21" N
Longitude: 70°27'26" W
NOAA Chart #

Geographic Response Strategy		Popponesset Bay C115			
Tactic #	Purpose	Response Equipment	Deployment Resources	Deployment Notes	
DF-01 	Direct spilled oil away from a location to be protected or to change the course of the slick.	1500 ft protected water boom 9 marine anchor system 1 shoreline anchor system	2 shore responders 2 response boats 6 boat responders	Tend through tidal changes. Deploy boom as depicted to deflect incoming oil away from sensitive areas. Anchor every 200-300'. Deploy shoreside anchor first.	
		Testing Date	N Tested		
DV-02a 	Redirect spilled oil from one location or direction of travel to a specific site for recovery.	1500 ft protected water boom 8 marine anchor system 2 shoreline anchor system	2 shore responders 2 response boats 6 boat responders	Tend through tidal changes. Deploy boom as depicted to divert incoming oil to the collection site. Anchor every 200-300'. Adjust angle as necessary to reduce entrainment. Set up shoreside recovery and tend throughout tide. Deploy shoreside anchor first.	
		Testing Date	N Tested		
DV-02b 	Redirect spilled oil from one location or direction of travel to a specific site for recovery.	400 ft protected water boom 2 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to divert incoming oil to the collection site. Anchor every 200-300'. Adjust angle as necessary to reduce entrainment. Set up shoreside recovery and tend throughout tide. Deploy shoreside anchor first.	
		Testing Date	N Tested		
EX-03a 	Prohibit oil slicks from entering a sensitive area	700 ft protected water boom 4 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first.	
		Testing Date	N Tested		
EX-03b 	Prohibit oil slicks from entering a sensitive area	300 ft protected water boom 1 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first.	
		Testing Date	N Tested		
EX-03c 	Prohibit oil slicks from entering a sensitive area	400 ft protected water boom 2 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first.	
		Testing Date	N Tested		
EX-03d 	Prohibit oil slicks from entering a sensitive area	1200 ft protected water boom 6 marine anchor system 2 shoreline anchor system	2 shore responders 2 response boats 6 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first. Readjust boom angle as needed to reduce entrainment	
		Testing Date	N Tested		
EX-03e 	Prohibit oil slicks from entering a sensitive area	1200 ft protected water boom 6 marine anchor system 2 shoreline anchor system	2 shore responders 2 response boats 6 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first. Readjust boom angle as needed to reduce entrainment	
		Testing Date	N Tested		
EX-03f 	Prohibit oil slicks from entering a sensitive area	400 ft protected water boom 2 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first.	
		Testing Date	N Tested		
EX-03g 	Prohibit oil slicks from entering a sensitive area	400 ft protected water boom 2 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first.	
		Testing Date	N Tested		
EX-03h 	Prohibit oil slicks from entering a sensitive area	400 ft protected water boom 2 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 3 boat responders	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent. Deploy shoreside anchor first.	
		Testing Date	N Tested		
PR-04 	Remove spilled oil by collecting it in a sorbent material	1400 ft sorbent boom 1400 ft sorbent pom-poms 40 anchor stakes	2 shore responders	Place and stake snare or sorbent boom in areas that are likely to pool and collect oil and across the mouths of the streams and intertidal areas. Use snare boom for persistent oils and sorbent boom for non-persistent oils. Approach the streams and intertidal areas on rising tide. Replace as necessary to maximize oil recovery.	
		N/A	Testing Date		Tested
FO-05 	Contain and recover spilled oil on the water in the offshore & nearshore environment	1 or more onwater skimming systems		Deploy on-water recovery task force(s) in configuration suitable for types of vessels used and sea conditions, with skimming system(s) and temporary storage for recovered oil and water. Location not exact, will move to chase oil.	
		N/A	Testing Date		Tested
FO-05 	Contain and recover spilled oil on the water in the offshore & nearshore environment	1 or more onwater skimming systems		Deploy on-water recovery task force(s) in configuration suitable for types of vessels used and sea conditions, with skimming system(s) and temporary storage for recovered oil and water. Location not exact, will move to chase oil.	
		N/A	Testing Date		Tested
SR-06 	Remove spilled oil that has been diverted to a designated recovery site accessible from shore	2 skimming system 2 storage tank or bladder 2 hoses, pumps, fittings	2 shore responders	Set up shoreside recovery tactic at general location depicted on map. Some access points located at private residences. Access may be difficult.	
		N/A	Testing Date		Tested

Local contacts

Mashpee/Wampanoag	(508) 990-2860
Mashpee-Fire Chief	(508) 539-1454
Mashpee-Harbormaster	(508) 539 1450
Mashpee-Shellfish	(508) 539 1439
Barnstable Harbormaster	(508) 790-6272
Barnstable-Fire	(508) 362-3312
Mashpee NWF	(978) 443-4661
Nantucket Soundkeeper	(508) 775-9767
USFWS	(413) 539-3194



Popponeset Beach looking north

Resources Protected

Marine Mammals	Seals
Fish	Shellfish, finfish
Invertebrates	None identified
Birds	Waterfowl concentration, Seabirds, shorebirds
Threat/End. Species	Piping Plovers (April 1-August 31)
Cultural	None identified
Subsistence	None identified
Human Use	Commercial boat harbor, aquaculture, high-use recreational area
Commercial Fishing	None identified
Land Management	NWR
Coastal Habitat	Marsh, sheltered tidal flats, barrier beach



Pinquickset Cove (site of EX-03f) looking west

Special Considerations & Navigational Hazards

Use extreme caution. Shoal waters with numerous reefs rocks & continually shifting sand bars. Currents and winds are locally variable and can create dangerous operating environments. Vessel operators should have local knowledge.